

ENCORE[®] LIQUID CHEMICAL METERING PUMPS



SOLUTIONS THAT WORK




Encore® 700

With over 100 years of liquid feed experience, cleanwater1 continues to be the leader in disinfection and chemical feed systems for potable water, wastewater and industrial process applications.

cleanwater1 products provide safe, reliable and accurate methods of controlling the addition of chemicals to water sources or processes. cleanwater1 equipment can be used to accurately dose chemicals ranging from sodium hypochlorite and caustics to viscous polymers and slurries. High performance materials are used in all critical areas to ensure optimum compatibility and long service life. The complete line of liquid feed equipment offers an extensive range of capacities from 0.09 gph (0.3 lph) to over 660 gph (2,500 lph).



Encore® 700

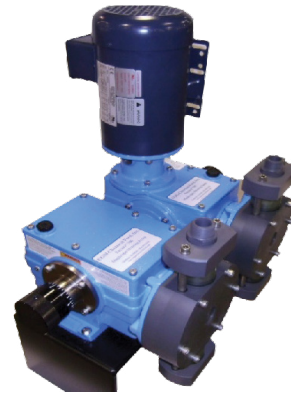

Encore® 700
Double Simplex Pump

With cleanwater1 products, you do not have to compromise on a marginal liquid feed and controls technology for a particular application. Instead, you can choose from multiple technologies to match the best pump to your application.

A rugged, heavy duty mechanical diaphragm metering pump available with six diaphragm sizes and double simplex capability to handle capacities up to 660 gph and backpressure to 175 psi.

- Non-Loss motion stroke adjust mechanism for reliability and longevity.
- Available in either a direct drive configuration or a pulley coupled arrangement for additional 4:1 turndown on stroke frequency.
- Manual control or control via an automatic stroke length positioner or variable speed drive or both
- Optional diaphragm leak detector.

Encore® motor driven metering pumps use a rugged drive mechanism and composite diaphragm for long life and easy serviceability. Suitable for most chemicals across a wide range of capacities and pressures.


“ For 13 years, our Encore® 700 pumps have been running perfectly. We are very pleased. This is the best pump I’ve ever used! We keep them maintained and they just seem to run forever. ”

Tim Sherman
Treatment Facility Supervisor
City of Salem, OR

Key Features and Benefits

About the Encore® 700

- 1 Short suction and discharge ports minimize friction losses and cavitation, improving hydraulic characteristics and providing **far more efficient fluid metering** than conventional liquid designs.
- 2 Our premium composite diaphragm is manufactured to stringent specifications to ensure **long life even with the most demanding applications**. The design incorporates PTFE facing, for the highest degree of chemical resistance, and nylon reinforcements, all bonded to a preformed elastomeric support. We've added convolutions for unconstrained accuracy even at varying discharge pressures, and an O-ring groove in the head's diaphragm cavity for complete sealing.
- 3 A secondary diaphragm seal completely separates the pump head from the drive unit. This double diaphragm isolating design **eliminates the risk of cross-contaminating** gearbox lubricant and process fluid.
- 4 High precision guided, ball and seat, clear PVC cartridge valves are available to provide **built-in sight flow indication and fast, foolproof service**. The proven design includes wide flow paths and four-point guides to control ball rise and assure proper seating. The valve housing is compression-sealed to the pump head and pipe connectors by O-rings and is easily removed for the service or replacement without disturbing the external piping.
- 5 Available with standard induction, variable speed, or inverter duty motors for **wider operating ranges and automatic process control**.
- 6 This proven robust mechanical assembly features liberal use of heavy-duty parts, including an epoxy-painted cast iron gearbox for **superior corrosion resistance**, stainless steel fasteners, load-absorbing tapered roller bearings, robust gears, and steel and nodular iron drive components.
- 7 An optional diaphragm **leak detection system** senses the early stages of diaphragm failure. The system consists of a solid-state, electro-optic sensor that mounts to the liquid end and a control box. This box, which can be mounted at the pump, or up to 100 ft. (30m) away, can monitor two liquid ends. LED's and a relay provide both local and remote indication of failure.
- 8 Obtain **precise and highly repeatable feed rate** settings with a 10-turn, micrometer-type stroke length adjuster. A percent scale and vernier indicate stroke length in 0.25% increments. Feed rate is infinitely adjustable from 0 to 100%. Optional automatic capacity control via stroke length is also available.
- 9 Available in either a direct drive configuration or a pulley coupled arrangement for additional 4:1 turndown on stroke frequency.

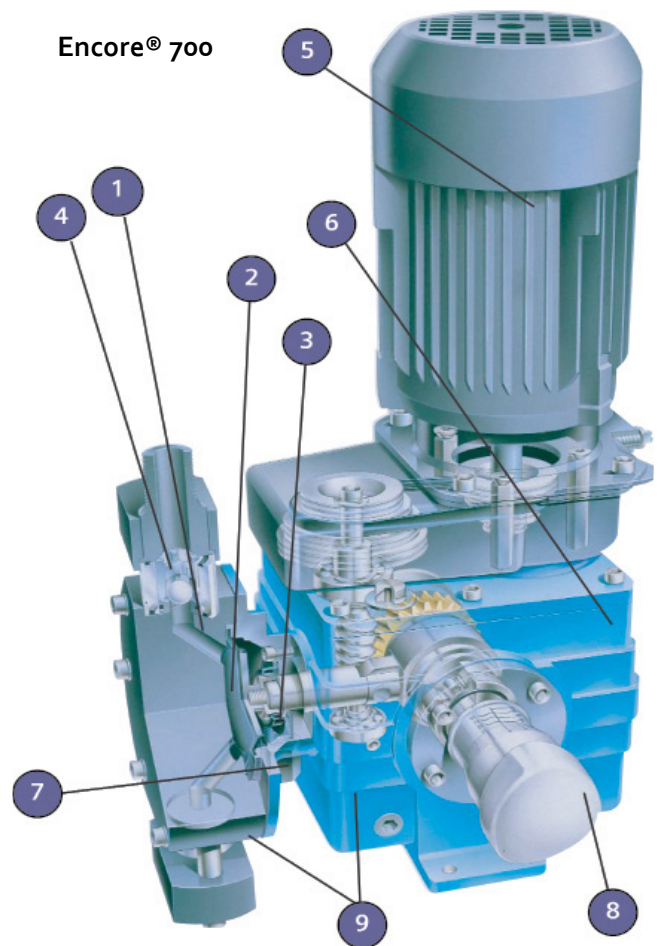

Benefits

- 5 Year Drivetrain Warranty
- 24-to-48 hour shipping for most build-to-order requests
- Configurations to meet all liquid chemical and slurry applications for water and wastewater treatment

Additional Products



Plunger Pump

The Encore® 700 Plunger Pump utilizes the proven Encore® 700 gearbox to meet high pressure applications. It is available in four capacities, up to 38 gph and up to 2900 psi.



Chemical Metering Pump Skid

The pre-wired, plumbed and tested skid can be easily installed and commissioned within a short period of time, reducing the need for extensive on-site prep work.

The turnkey skid system saves time and labor costs, allowing quick implementation of the equipment into the plant operation.

Accessories

cleanwater¹ can supply a complete line of hydraulic accessories, as well as custom designed skid mounted pump and dosing packages to suit virtually any municipal or industrial application.

Parts and accessories are available for all Encore® models and sizes.

“The Encore® 700 pumps have been working great for us. They’re a lot less maintenance – virtually maintenance-free – and the problems we had with the previous pump just aren’t there with the Encore® 700.

We plan to continue converting every pump at all of our wells.”

Peter Ranaldo

Assistant Superintendent, Jericho Water District, NY



cleanwater¹



© 2023 cleanwater¹, inc. Subject to change without prior notice. Literature No. CF.400.000.000.SB.0724

Encore® is a trademark of cleanwater¹. The information provided in this literature contains merely general descriptions or characteristics of performance which in actual case of use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of a written contract.

1901 West Garden Road | Vineland, NJ 08360
Phone: 856.896.2160 | Email: sales@cleanwater1.com

cleanwater¹.com