

MICROCLOR[®] ON-SITE HYPOCHLORITE GENERATION



Scan the QR code to visit our
website for more information



Making Bleach Makes Sense

Microclor® On-Site Hypochlorite Generation. The safe, clean and green disinfection option.

As concerns mount and regulations change regarding the safety and security of using chlorine gas for water disinfection, many utilities are choosing sodium hypochlorite (bleach) as a safer disinfection alternative. Once the decision to convert to a safer alternative has been made the question remains whether to purchase or produce sodium hypochlorite.

Safety

Microclor's hypochlorite solution is below most hazardous material concentration thresholds - 0.8% versus 1%. This reduces operator HAZMAT exposure and eliminates the need for diluting commercial hypochlorite to compensate for degradation which results in inconsistent solution strength.

Fewer Deliveries

The only raw materials required for the OSHG process are salt and water. This will reduce vendor deliveries by about 66% compared to commercial bulk hypochlorite. Less hazardous traffic will reduce the potential for accidents and eliminate the associated carbon footprint.

Continuity of Operations

Microclor® OSHG will enable storage of larger quantities of raw materials (salt) necessary for your disinfection process. This will result in a more sustainable and robust treatment facility better able to withstand the demands imposed by a natural disaster or health emergency.

Reduced Operational Costs

Since all chlorine compounds are derived from salt, on-site electrolytic conversion can result in significant savings to the owner. Typically, it costs 50-70% less to produce sodium hypochlorite as compared to buying it as commercial grade hypochlorite.



“ The Microclor® OSHG systems are a safer, cost-effective and easier to maintain alternative to our previous OSHG systems. OSHG continues to be an excellent technology for our multiple and dispersed well-sites. ”

Juan Ramirez, Water Services Production Supervisor
City of Santa Ana, California

Making Bleach Made Easy

The safety and cost effectiveness of On-Site Hypochlorite Generation makes it the best option for disinfecting water.

Since 1988 On-Site Hypochlorite Generation (OSHG) has been recognized as an effective method for disinfection of water. cleanwater¹ has dramatically improved the technology into the robust and reliable design of the patented Microclor[®] OSHG system.

The patented Microclor[®] OSHG design is the result of over twenty-five years of experience in the manufacturing, installation and servicing of hypochlorite generation equipment. Advancements in system safety and ease of operation make Microclor[®] OSHG the right choice for water treatment professionals.

Vertical, Multi-Cell Configuration

The Microclor[®] OSHG vertical cell arrangement is the most significant of the many features that distinguish it from the earlier generations of equipment.



Single Cell



Multi-Cell

Direct Hydrogen Management

The electrolytic cells are configured in a vertical array and vented directly to atmosphere. This prevents the chance of over pressurization by releasing virtually all hydrogen directly from each cell. Other systems use the storage tanks as hydrogen separators which can contribute to excessive cell pressure and vibration in the discharge piping.

High-Velocity Electrolyte Circulation

The hydraulic lift created by the hydrogen separation circulates electrolyte through the cell loop at 3 fps. This reduces the requirement for cell cleaning and minimizes heat accumulation in the cell.

Full-Wave DC Power

Automated brine control allows full-wave rectification (constant voltage) which greatly reduces excess heat and the number of components necessary in the rectifier. This reduces facility HVAC loads and improves system reliability.


Compact Cell Design

The cell's vertical orientation not only allows better hydrogen separation but is also more compact, resulting in a more space-efficient footprint. The clear acrylic cell body supports the electrode array and eliminates the need for internal baffles and fasteners, reducing maintenance and repair costs over the life of the system.

Microclor[®] OSHG Product Parameters

| | Capacity | | | | Total Flow | | Brine Flow | | Water Flow | | Incoming Power Ratings (FLA) | | | | | |
|---------|----------|------|--------|-------|------------|------|------------|-----|------------|------|------------------------------|---------|---------|---------|---------|---------|
| | PPD | KgPD | FORMAT | CELL | GPM | LPM | GPM | LPM | GPM | LPM | 208V/1Φ | 240V/1Φ | 208V/3Φ | 380V/3Φ | 480V/3Φ | 600V/3Φ |
| MC-20 | 20 | 9 | 1X20 | 2X12 | 0.2 | 0.8 | 0.02 | 0.1 | 0.18 | 0.7 | 13 | 11 | 7 | 4 | 3 | 2 |
| MC-40 | 40 | 18 | 2X20 | 2X12 | 0.4 | 1.5 | 0.04 | 0.2 | 0.36 | 1.4 | 26 | 22 | 14 | 8 | 6 | 5 |
| MC-60 | 60 | 27 | 3X20 | 2X12 | 0.6 | 2.3 | 0.06 | 0.2 | 0.54 | 2.0 | 39 | 33 | 21 | 12 | 9 | 7 |
| MC-80 | 80 | 36 | 4X20 | 2X12 | 0.8 | 3.0 | 0.08 | 0.3 | 0.72 | 2.7 | | | 28 | 15 | 12 | 10 |
| MC-100 | 100 | 45 | 5X20 | 2X12 | 1 | 3.8 | 0.10 | 0.4 | 0.90 | 3.4 | | | | 19 | 15 | 12 |
| MC-160 | 160 | 73 | 4X40 | 4X12 | 1.6 | 6.1 | 0.16 | 0.6 | 1.44 | 5.5 | | | | 31 | 24 | 19 |
| MC-200 | 200 | 91 | 5X40 | 4X12 | 2 | 7.6 | 0.20 | 0.8 | 1.80 | 6.8 | | | | 38 | 30 | 24 |
| MC-300 | 300 | 136 | 5X60 | 6X12 | 3 | 11.4 | 0.30 | 1.1 | 2.70 | 10.2 | | | | 58 | 46 | 37 |
| MC-400 | 400 | 182 | 5X80 | 8X12 | 4 | 15.1 | 0.40 | 1.5 | 3.60 | 13.6 | | | | 77 | 61 | 49 |
| MC-500 | 500 | 227 | 5X100 | 10X12 | 5 | 18.9 | 0.50 | 1.9 | 4.50 | 17.0 | | | | 96 | 76 | 61 |
| MC-600 | 600 | 273 | 5X120 | 12X12 | 6 | 22.7 | 0.60 | 2.3 | 5.40 | 20.4 | | | | 115 | 91 | 73 |
| MC-800 | 800 | 364 | 5X160 | 12X16 | 8 | 30.3 | 0.80 | 3.0 | 7.20 | 27.3 | | | | 154 | 122 | 97 |
| MC-1000 | 1000 | 455 | 5X200 | 12X20 | 10 | 37.9 | 1.00 | 3.8 | 9.00 | 34.1 | | | | 192 | 152 | 122 |
| MC-1200 | 1200 | 545 | 5X240 | 12X24 | 12 | 45.4 | 1.20 | 4.5 | 10.80 | 40.9 | | | | 231 | 183 | 146 |
| MC-1600 | 1600 | 727 | 10X160 | 12X16 | 16 | 60.6 | 1.60 | 6.1 | 14.40 | 54.5 | | | | 307 | 243 | 195 |
| MC-2000 | 2000 | 909 | 10X200 | 12X20 | 20 | 75.7 | 2.00 | 7.6 | 18.00 | 68.1 | | | | 384 | 304 | 243 |
| MC-2400 | 2400 | 1091 | 10X240 | 12X24 | 24 | 90.8 | 2.40 | 9.1 | 21.60 | 81.8 | | | | 461 | 365 | 292 |

The Next Generation On-Site Sodium Hypochlorite Generator

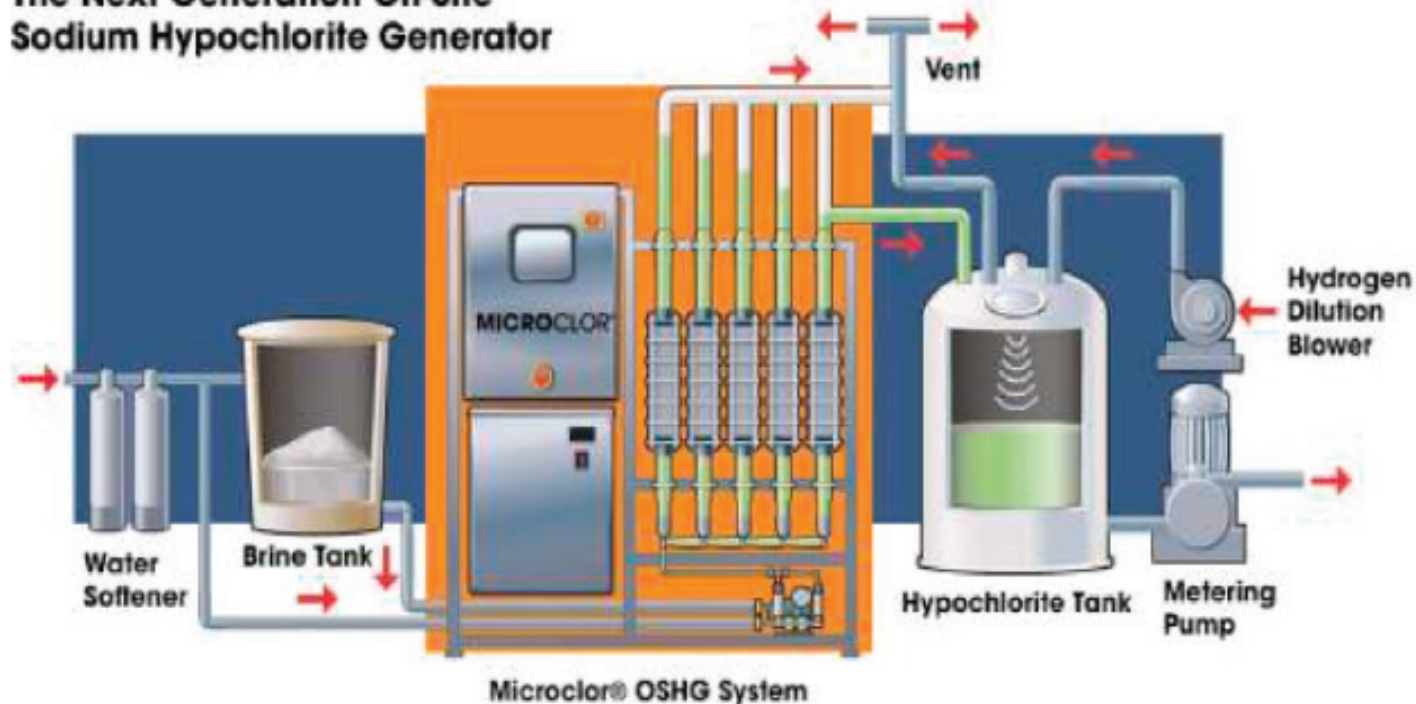

Microclor® OSHG is modular in design and utilizes standard components which are easily customized to meet a wide range of requirements.

“ The simplicity of the Microclor® OSHG system never ceases to impress me. Based on my prior experience with on-site hypochlorite generation, I never knew a system could be so easy to operate and maintain. Love it. ”

*Leo Williams, Mountain Regional Water SSD
Operations Superintendent, Park City, Utah*

Free Available Chlorine

0.8% +/- 0.05%

Consumables per Pound of Chlorine Produced

~ 2.5-3.5 lbs salt

1.8-2.4 kWh(AC)

14.0-17.0 gallons water

Water Input

Potable water

50-80 PSI

55°F-78°F (13°C-25°C)

Salt

99.7% pure dry weight Morton White Crystal or equivalent

cleanwater1®

550 Sycamore Drive | Milpitas, CA 95035
Tel: 858.218.3745 | Fax: 858.218.3790
Email: sales@cleanwater1.com

cleanwater1.com



The information provided in this literature contains merely general descriptions or characteristics of performance which in actual case of use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of a written contract.