

Liquid Feed Systems Metering Pump Control Panel

The Metering Pump Control Panel is specifically engineered and designed for control of Encore® and Chemtube® metering pumps. The panel utilizes a variable speed controller, which controls the speed of the pump's motor, and uses state-of-the-art technology. The enclosure is NEMA 4X rated with a continuous-hinged, gasket door. It includes indication of pump status via pilot lights and a digital motor speed indicator, as well as normally closed contact for remote indication of pump run or failure. A standard disconnect switch is provided.

It has the capability of local or remote control with the use of a built-in Hand-Off-Auto switch. A 4-20mA output signal is provided for indication of pump motor speed.

The metering pump control panels are available in VFD or SCR versions.

Features include:

- NEMA 4X Fiberglass enclosure
- Pump speed digital meter
- Control panel power ON pilot light
- Pump run pilot light
- Pump failure pilot light
- Main disconnect switch
- Start-stop control mode
 - Hand-Off-Auto
 - Auto mode via remote customer contact
- Pump speed control mode
 - Local - Remote
 - Local via potentiometer
 - Remote via external 4-20 mA input
- Remote stop function provision for customer- supplied contact or stop button
- Pump motor overload input monitoring
- Dry, normally open, 10-Amp contact for remote indication of pump run and failure
- Pump speed 4-20 mA output
- Spare terminal blocks
- 120 VAC, 1 Ph, 60 Hz input
- Optional UL listed panel, SCU / PCU, and diaphragm leak detection

Key Benefits

- *Choice of variable speed controls; VFD or SCR*
- *State-of-the-art technology for metering pump control for existing or new installations*
- *Standard NEMA 4X fiberglass enclosure, stainless steel is optional*
- *Safe operation with standard lock-out disconnect switch*
- *User friendly controls*
- *Choice of signal or dual pump controls*

DC Version


- Supports 1/2 HP, 3/4 HP, and 1 HP, 90 VDC motors
- Range 50:1, closed loop
- Accuracy 0.5% of base speed, closed loop

VFD Version

- Supports 1/2 HP, 3/4 HP, and 1 HP, 230 VAC, 3 Ph, inverter duty motors
- Range 60:1
- Accuracy 1% of base speed



Liquid Feed System Metering Pump Control Panel *

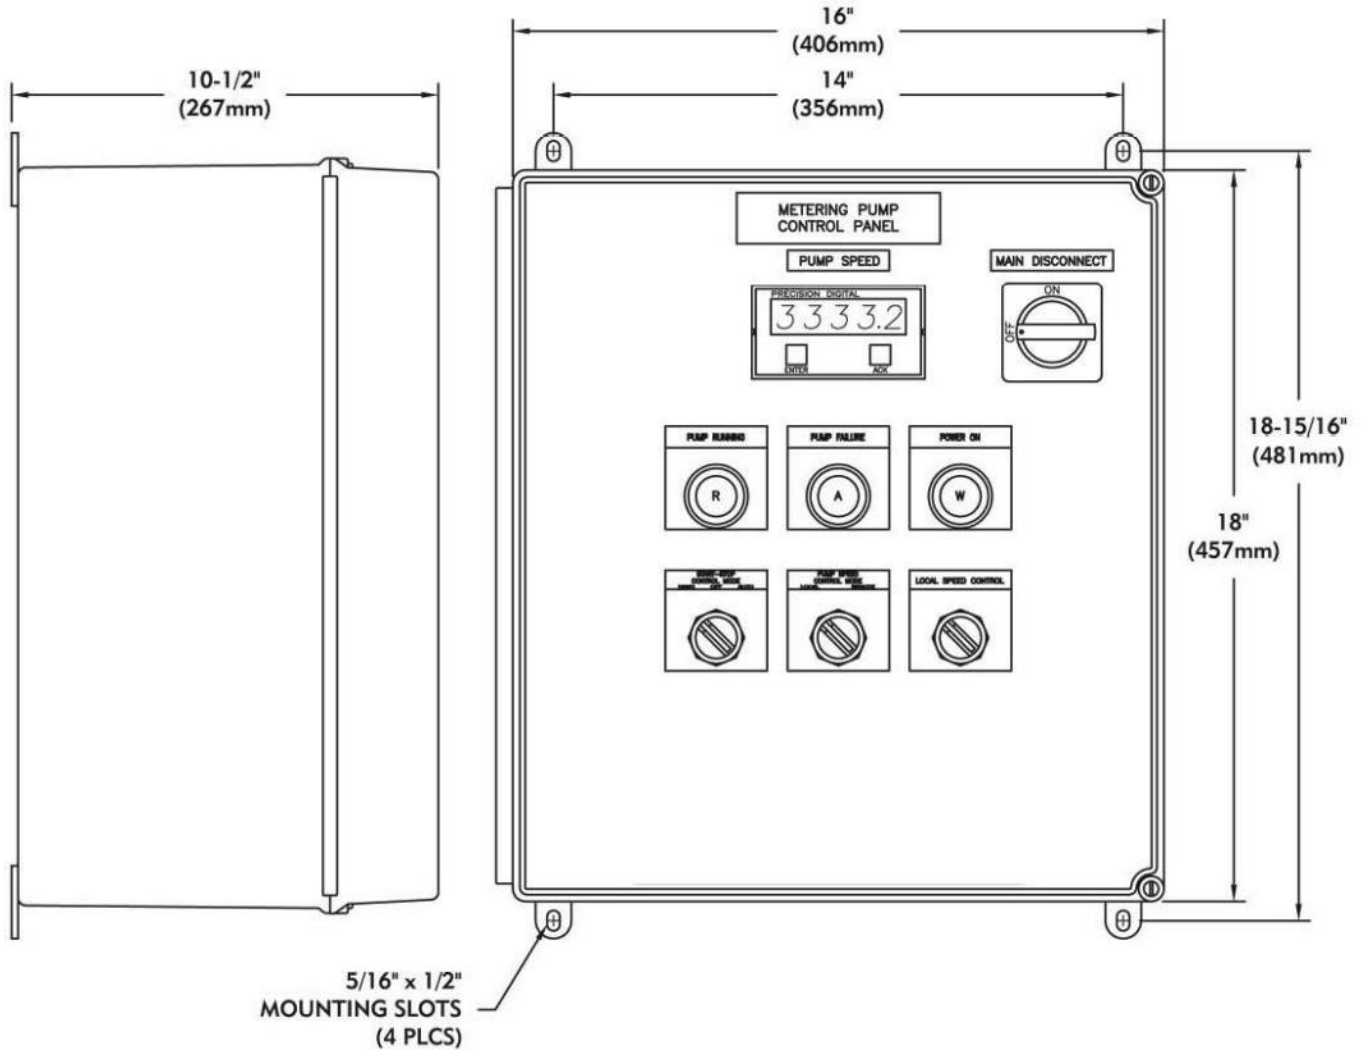

Enclosure Rating: NEMA 4X, Fiberglass Power
 Required: 120 VAC, 1Ph, 60 Hz

* Note: Single pump panel shown. Consult factory for dual pump control panel dimensions.

cleanwater1

1901 West Garden Road | Vineland, NJ 08360
Tel: 856.896.2160 | Email: info@cleanwater1.com

cleanwater1.com

© 2023 cleanwater1, inc. Subject to change without prior notice.

The information provided in this literature contains merely general descriptions or characteristics of performance which in actual case of use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of a written contract.