


cleanwater1
o

VELOBLEND™

ADVANCED LIQUID POLYMER ACTIVATION TECHNOLOGIES

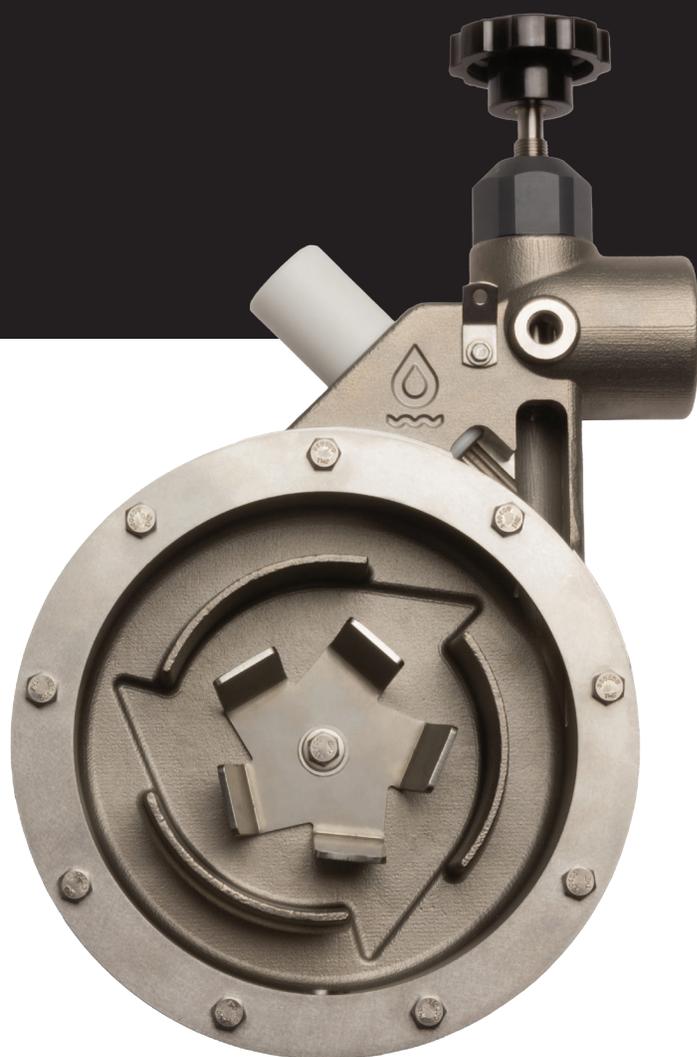

SOLUTIONS THAT WORK




Optimizing Liquid Polymer Performance

There have been numerous technologies introduced over the last thirty years designed to activate liquid polymer. The advanced hybrid VeloBlend™ technology has proven to more efficiently induce ultra-high, non-damaging mixing energy, delivering the highest polymer performance over any other technology in the industry.


Neat “As-Supplied” Polymer

Neat polymer, as supplied, is primarily comprised of coiled-up polymer, oil, water, and inverting surfactant.



Partially Uncoiled Polymer—Insufficient Mixing Energy

If polymer is exposed to insufficient mixing energy the polymer fails to fully activate with the same negative results in polymer cost and process performance as is seen with damaged polymer.



Unactivated Polymer Molecule Capable of Withstanding High Mixing Energy

In its “neat” (as-supplied) state, the polymer is coiled up like a spring and is capable of withstanding ultra-high mixing energy without damage to its molecular structure.




Fully Activated, Undamaged Polymer—Delivering Optimal Performance

When neat, coiled-up polymer is properly exposed to ultra-high mixing energy, the oil is effectively “scrubbed” from the polymer, allowing it to become highly activated without damage.



Damaged Polymer—Caused By Excessive Shear

Once the polymer uncoils, the elongated polymer is now susceptible to damage caused by excessive shear. The result is increased polymer usage, increased polymer cost and reduced process performance.





The VeloBlend is simply the best polymer activation technology ever developed.

The VeloBlend’s Hybrid Technology more effectively induces ultra-high, non-damaging mixing energy over the system’s full flow range than any other technology on the market.

Exclusive Hybrid Activation Technology

We started by perfecting hydro-dynamic, non-mechanical mixing energy. Born from thirty years of experience, the VeloBlend VH series optimizes the use of non-mechanical mixing energy, exceeding the performance and reliability over existing technologies.

We then eliminated the biggest drawback to non-mechanical blending—its reliance on water pressure. The VeloBlend™ hybrid polymer activation technology combines the reliability of hydrodynamic, non-mechanical mixing energy with controllable, variable speed hydro-mechanical mixing energy. This process allows for precise control of mixing conditions, allowing optimal performance of any polymer available.

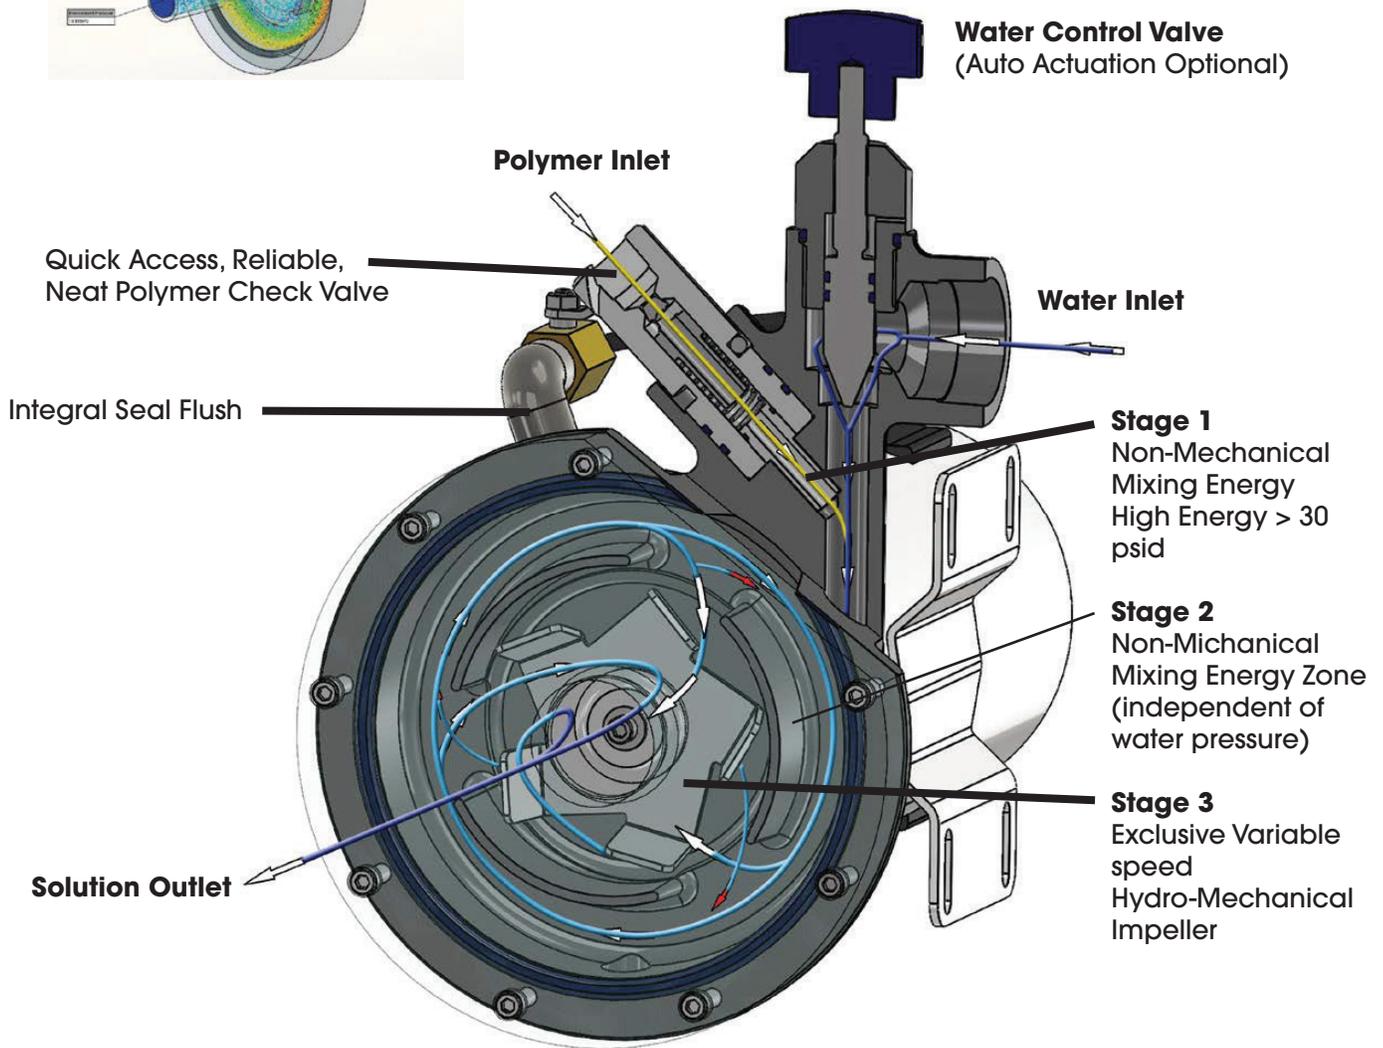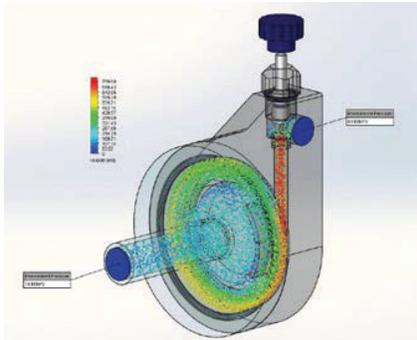

The Versatile VeloBlend™ System



Series 6000

- Skid Configuration #2
- Progressive Cavity Pump
- Range: from 0.2 up to 100 GPM Solution
- Control Levels D thru RpSB

1. Activation Chamber

VeloBlend Advanced Liquid Polymer Activation Technology delivers unsurpassed performance and reliability.

2. Dilution Water System

Up to 600 GPM to meet your application requirements.

3. NEMA 4X Controls

Five standard control systems are available to meet your specific control requirements.

4. Neat Polymer Pump

Progressive cavity pumps standard. Other pump types optional.

5. Rugged Stainless Steel Skid

Available in 304 or 316 stainless steel. Open design for ease of maintenance. Designed to provide ideal pump suction conditions.



Series 2400

- Skid Configuration #1
- Progressive Cavity Pump
- Range: from 0.2 up to 50 GPM Solution
- Control Levels D & E



Series 12000

- Skid Configuration #3
- Progressive Cavity Pump
- Range: from 10 up to 200 GPM Solution
- Control Levels D thru RpSB



Series 36000

- Skid Configuration #4
- Progressive Cavity Pump
- Range: from 40 up to 600 GPM Solution
- Control Levels D thru Rw

Model # Example: Build Your VeloBlend™:

BASE MODEL	CONTROL LEVEL	PLC/HMI OPTION	POWER	SKID SIZE
VM-10P-1200	RpSB	3D	A	2

BASE MODEL:

VELOBLEND BASE MODEL	POLYMER GPH*	WATER GPH**	SKID SIZE BASED ON CONTROL LEVEL (SEE CHART BELOW)				
			D	E	Rw	Rp	RpSB
VM-0.5P-120	0.025 – 0.5	12 – 120	1			2	
VM-2P-300	0.1 – 2	30 – 300					
VM-3P-600	0.15 – 3	60 – 600					
VM-5P-1200	0.25 – 5	120 – 1200					
VM-10P-1800	0.5 – 10	180 – 1800					
VM-15P-2400	0.75 – 15	240 – 2400					
VM-30P-6000	1.5 – 30	600 – 6000			2		
VM-60P-12000	3.0 – 60	1200 – 12000			3		
VM-180P-36000	18 – 180	3600 – 36000			4		

*LOWER CAPACITIES AVAILABLE—CONSULT FACTORY **ALTERNATE PUMP/WATER RATE COMBINATIONS AVAILABLE—CONSULT FACTORY *** CAPACITIES SUBJECT TO CHANGE

CONTROL LEVEL:	CONTROL LEVELS				
	DISCRETE		PLC		
	D	E	Rw	Rp	RpSB
STANDARD CONTROL OPTIONS					
LOCAL & REMOTE START/STOP DISCRETE INPUT
4-20mA PUMP PACING ANALOG INPUT
4-20mA SOLIDS DENSITY ANALOG INPUT					.
SYSTEM RUNNING DISCRETE INPUT
SYSTEM IN REMOTE DISCRETE INPUT
PUMP RATE ANALOG OUTPUT	
SOLUTION RATE ANALOG OUTPUT				.	.
COMMON ALARM DISCRETE INPUT
MANUAL WATER RATIO CONTROL	SEE PLC/HMI OPTIONS BELOW		.		
AUTO WATER RATIO CONTROL				.	.
SMARTBLEND™ RATIO CONTROL					.
ETHERNET COMMUNICATION				.	.

OTHER CONTROL OPTIONS AVAILABLE—CONSULT FACTORY

PLC/HMI OPTION:	PLC OPTIONS	COLOR TOUCHSCREEN HMI OPTIONS						
		C-MORE		ALLEN BRADLEY			MAGELIS	
		8"	10"	7"	10"	12"	7"	10"
		A	B	C	D	E	F	G
VELODYNE CONTROLLER	1	INTEGRAL 6" COLOR TFT TOUCHSCREEN						
ALLEN BRADLEY MICROLOGIX	2							
ALLEN BRADLEY COMPACTLOGIX	3				•			
MODICON MOMENTUM	4							

OTHER PLC/HMI OPTIONS AVAILABLE—CONSULT FACTORY

POWER OPTION:

A	120V / 1PH / 60Hz*
B	240V / 1PH / 60Hz
C	240V / 3PH / 60Hz
D	480V / 3PH / 60Hz
E	600V / 3PH / 50Hz

*NOT AVAILABLE FOR 200 GPM WATER AND ABOVE

SKID SIZE:

		WIDTH	DEPTH	HEIGHT
1	CONFIGURATION 1	34"	24"	42"
2	CONFIGURATION 2	34"	30"	72"
3	CONFIGURATION 3	48"	36"	72"
4	CONFIGURATION 4	?	?	?


STANDARD CONSTRUCTION 304SS, AVAILABLE IN 316SS

Veloblend™ Heavy Industrial

The VeloBlend industrial series is designed for the rigors of the pulp & paper, oil & gas, mining, and other demanding industries and applications.

Veloblend Industrial Series Features:


- Ratio control of polymer and water
- VeloBlend Stainless Mixing Chamber
- All stainless steel welded plumbing
- Magnetic flow meter for water flow
- Coriolis mass flow meter for neat polymer
- Skid mounted neat polymer strainer (simplex or duplex available)
- Heavy Duty stainless steel skid

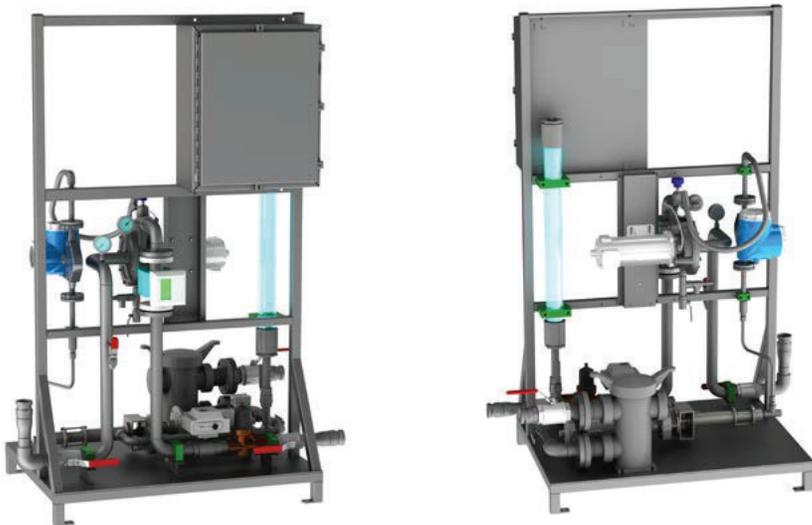


Polymer Processing Plants




Veloblend™ System Dimensions

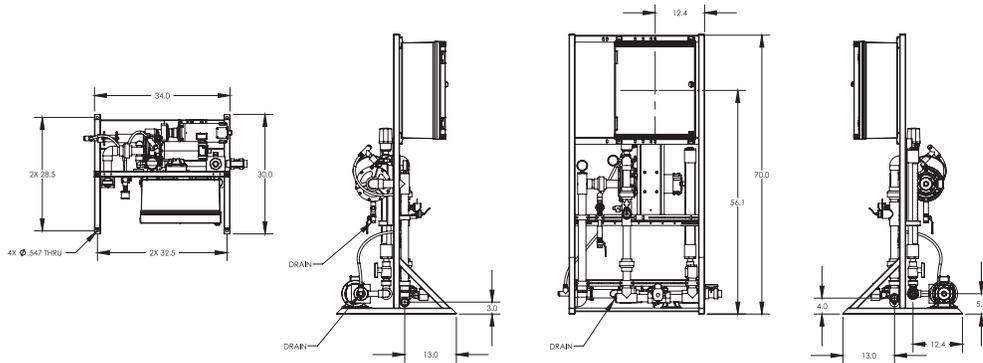


Dimensional Drawing of Skid #1

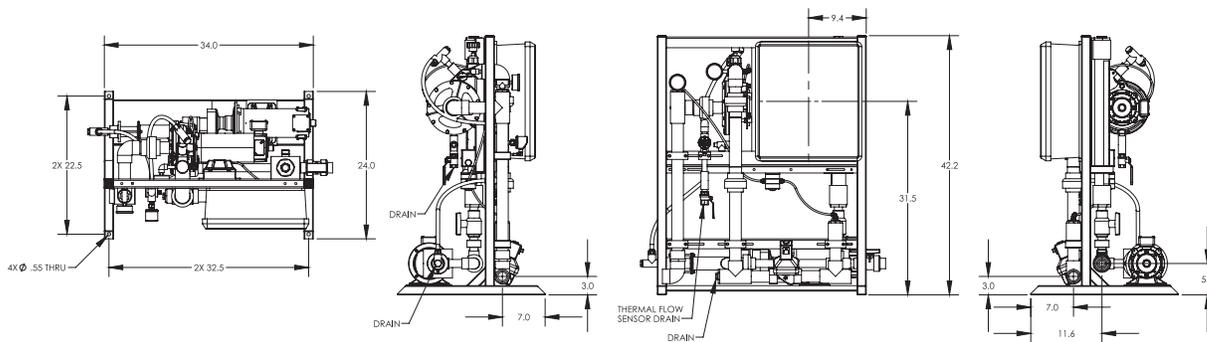

Dimensional Drawing of Skid #2

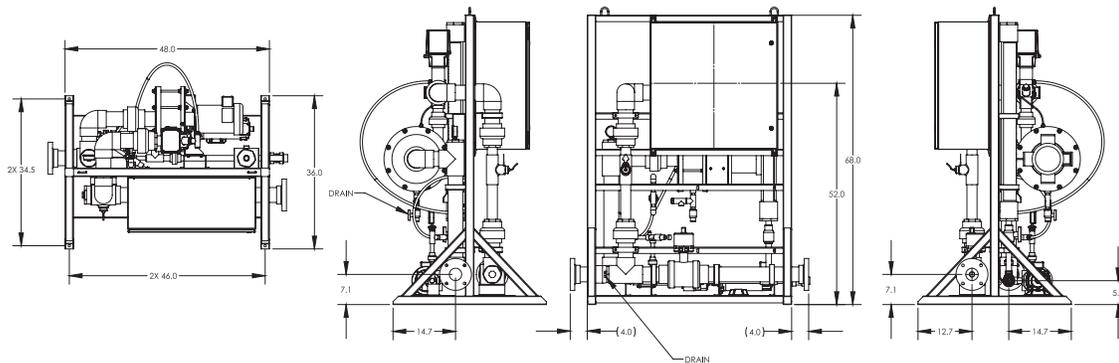

Dimensional Drawing of Skid #3

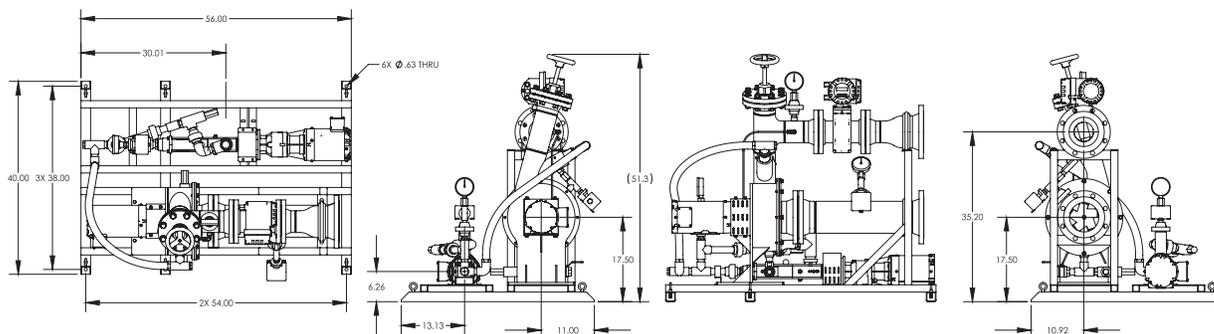

Dimensional Drawing of Skid #4

Note: drawings are for reference use only. Dimensions and designs are subject to change.

Related Products

Velodyne - Three Decades of Experience

For over thirty years our team has been dedicated to excellence. Through knowledge gained from thousands of installations worldwide, VeloDyne unites proven technologies with unsurpassed experience. Contact us to learn how our products and services can help optimize your treatment process.

More Proven Solutions From Velodyne

Dry Polymer Activation



Auger Feeders & Conveyors



Manual Bag Systems



Liquid Chemical Metering & Feed Systems



Bulk-Bag Systems



Lime Slakers



Containerized Systems



Silo Systems



cleanwater¹



543 S. Pierce Avenue | Louisville, CO 80027

Tel: 303.530.3298

Email: sales@velodynesystems.com

cleanwater¹.com

The information provided in this literature contains merely general descriptions or characteristics of performance which in actual case of use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of a written contract.